



TERRATRAK PLUS®

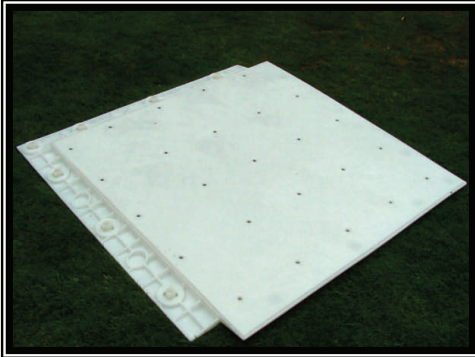

LEFT: Underside of assembled tile showing the 4-inch overlapping edge which creates excellent stability.
RIGHT: Inside of the bottom of the tile has a unique cross-hatch design giving it the highest load capacity in the industry, 152,000 lbs. psf.

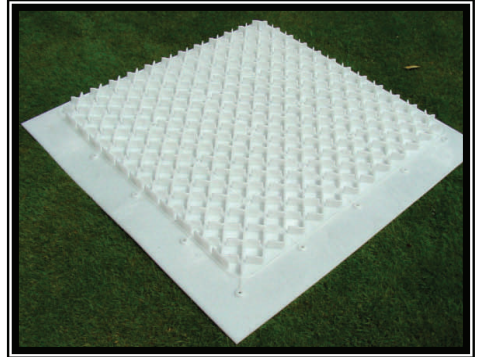

TERRATRAK PLUS® is the finest roadway system ever offered to those who value their grass fields



TERRATRAK PLUS®

Terratrak Plus Dimensions:

13.33 sf of surface per tile
47" sq and 1.63" high.

Storage and Transport:

Pinned in sheets of two (4' x 8') and placed on pallets 24 high. = 639 sq ft per pallet; if stacked 2 pallets high, 11,517 sq ft stores in a 45.5 ft by 8 ft

TERRAPLAS USA, LLC

1104 West State Hwy 31
Kilgore, Texas 75662

Phone: 903.983.2111

Fax: 903.983.2324

Web: www.TerraplasUSA.com

Email: terraplasusa@terraplasusa.com



After Day One, the grass under the TERRATRAK PLUS® is greener than the uncovered grass. Scientific research confirms this will happen through Day 4 allowing a field to grow back faster with TERRATRAK PLUS®

“PROTECTING YOUR TURF AS IF IT WERE OUR OWN”